


ACTIVA

infrared barriers

The versatility, reliability and attractive design are the key benefits of ACTIVA, which ensure efficient indoor and outdoor perimeter protection.

ACTIVA range consist of 7 models, differentiated by their length and number of beams. All them are available with two different body colour.

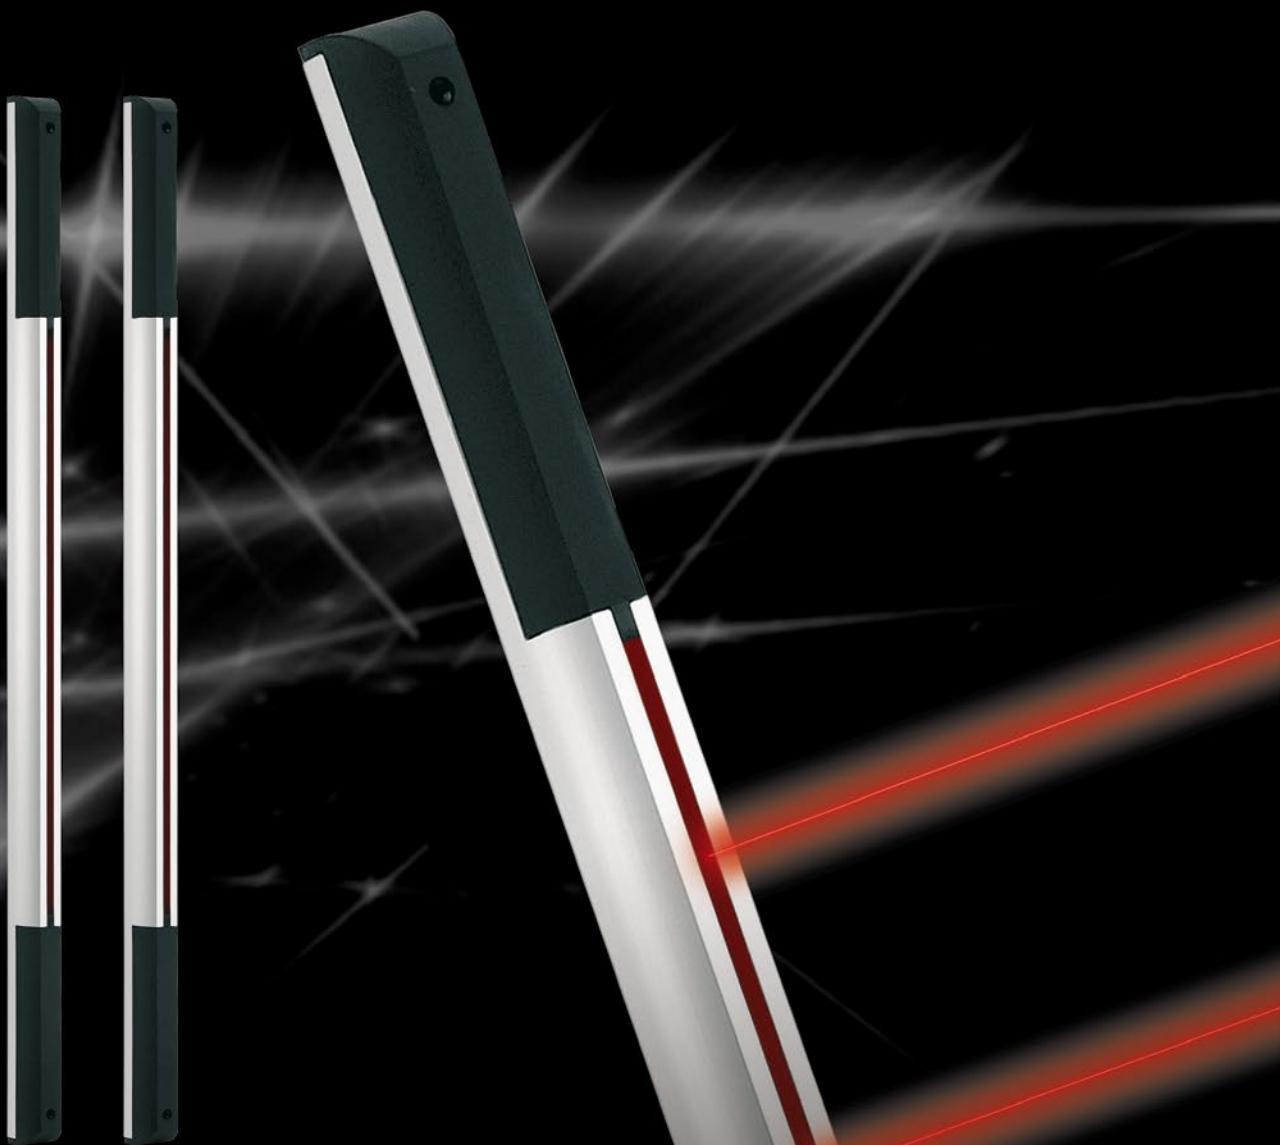

ACTIVA


infrared barriers

FEATURES

- encrypted, synchronous transmission preventing transmitter substitution
- 20m indoor range (10m outdoor)
- installation in parallel or perpendicularly to wall
- optical and acoustic indicator to facilitate installation
- possibility of outdoor operation
- detailed configuration via PC
- tamper protection against opening and removing from surface

APPLICATIONS

- perimeter protection
- door and window protection
- unobtrusive protection of valuable collections and pieces of art
- detection of designated area violation

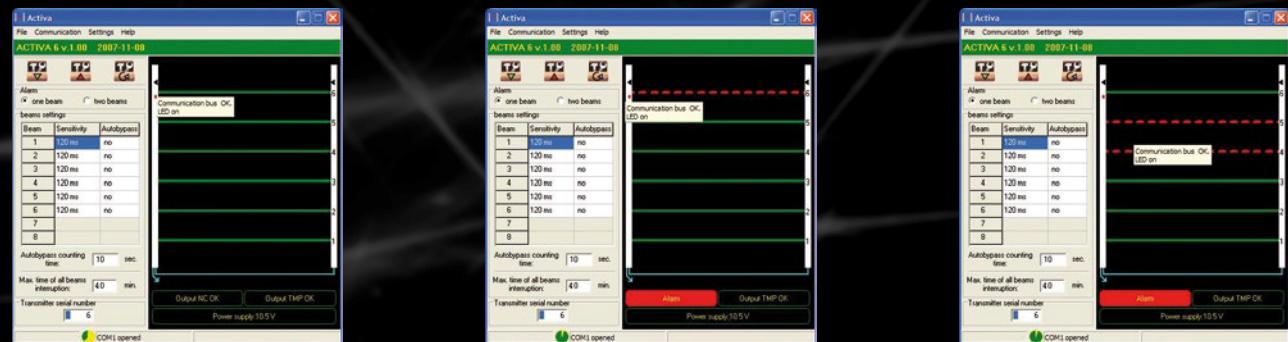

SPECIFICATIONS

Model	ACTIVA-2	ACTIVA-3	ACTIVA-4	ACTIVA-5	ACTIVA-6	ACTIVA-7	ACTIVA-8
Number of beams	2	3	4	5	6	7	8
Length (cm)	52	78	105	130	158	184	210
Panel depth (mm)				23,5			
Panel width (mm)				21,5			
Nominal power supply voltage				12 VDC ($\pm 15\%$)			
Current consumption, standby	40 mA	40 mA	40 mA	40 mA	40 mA	45 mA	45 mA
Current consumption, maximum	45 mA	45 mA	45 mA	50 mA	50 mA	50 mA	50 mA
Emitted wavelength				950 nm			
Indoor/outdoor range (m)				20/10			
Weight	0,432 kg	0,671 kg	0,896 kg	1,142 kg	1,366 kg	1,586 kg	1,818 kg
Operating temperature range				-25°C...+55°C			