


SPW-100

INDOOR SIREN WITH ACOUSTICAL SIGNALING

SPW-100 is a siren with acoustic signaling, designed for indoor installation and provided with piezoelectric transducer. There are three types of modulated tones with 120 dB intensity to choose from. The loud signal ensures good audibility over a large area, e.g. in warehouses, production halls, parking lots inside buildings, etc. With its oval enclosure, TS-100 can be either wall- or ceiling-mounted. The device is provided with tamper protection against opening the enclosure or tearing off the wall/ceiling.

- acoustical signaling: piezo transducer
- tamper protection against opening

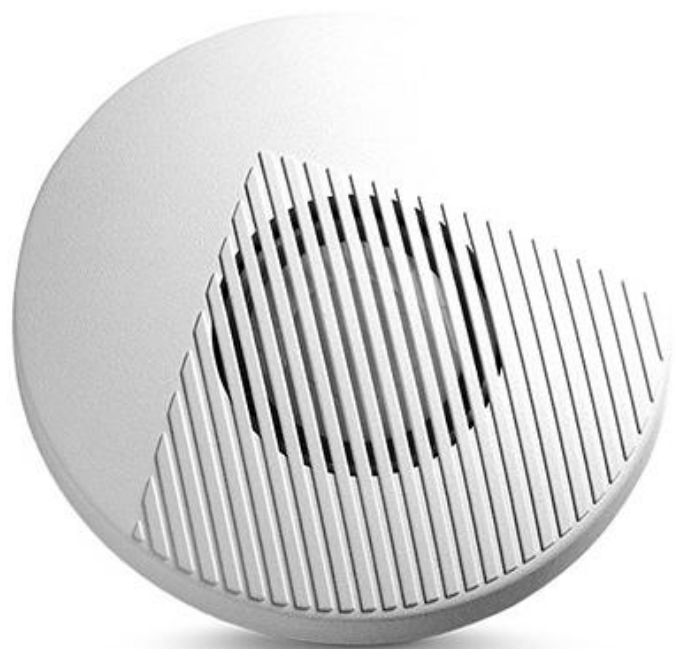

TECHNICAL DATA

| | |
|--|-------------------|
| Supply voltage | 12 V DC |
| Enclosure dimensions | 130 x 130 x 40 mm |
| Operating temperature range | -10...+55 °C |
| Max. current consumption | 320 mA |
| Weight | 170 g |
| The intensity of sound | 120 dB |
| Maximum humidity | 93 ±3% |
| Environmental class according to EN50130-5 | II |



The actual appearance of the products may differ from the presented images. Product descriptions are provided in the web service for information purposes only.